

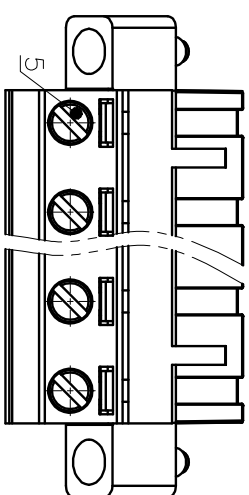
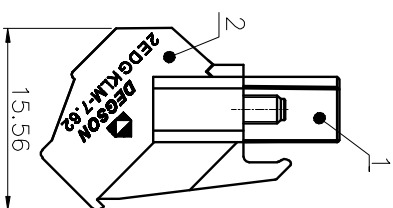
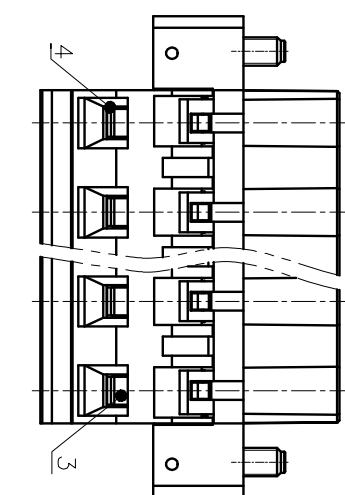



精度等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										形位公差/Geometric Tolerances		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±Z
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														

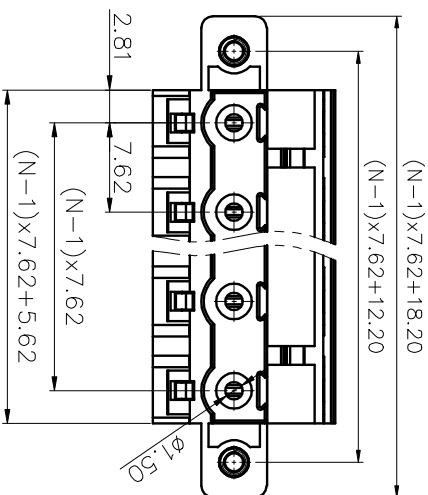

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
5	Screw1	Steel	M3/Zn Plated
6	Screw2	Steel	M2.5/Zn Plated

UL 标准/UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	300/10	
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2	
额定电压/电涌/Rated Voltage(V)/Current(A)	400/12	630/12	1000/12	
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6	6	6	
额定扭矩/扭矩 Tightening(N·m/Lbin)	M3, 0.5/4.43			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/24~12			
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~16P			
剥线长度/Stripping length(mm)	10~11			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS标准/Conform to RoHS				

MATERIAL: /
SURFACE: /

MAT NO.: /
STATUS: /

APPD: /
CHKD: /
DRT: WL 2017.8.4

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
宁波高松电子有限公司
DRAWING NO.: ZEDGKLM-7.62-C01
TYPE: CUSTOMER DRAWING
SCALE: 2:1
REV D0-1
SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE

1 2 3 4 5 6