

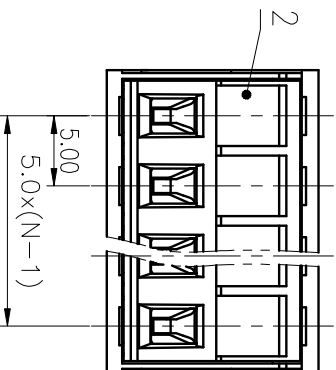



公差等级/General Tolerances(mm)		0.1/10	
0	>3	>10	>400
~	~	~	~
3	6	10	~500
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
±Z	±Z	±Z	±Z

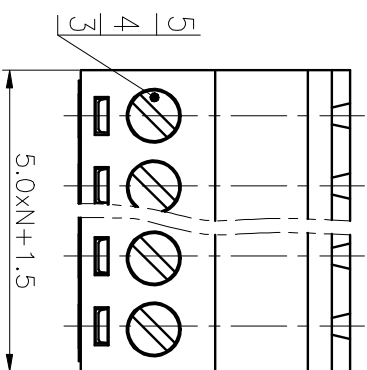

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET
1	2	3	4	5	6	1/1		
MATERIAL: / SURFACE: / MAT NO.: / STATUS: / APPD: LonQh 2020.05.18 CHKD: GongZh 2020.05.18 DRT: LY 2020.05.18					NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 2EDGKR-5.0-XXP-1Y-00A(H) DRAWING NO.: 10001870			
MATERIAL: / SURFACE: / MAT NO.: / STATUS: / APPD: LonQh 2020.05.18 CHKD: GongZh 2020.05.18 DRT: LY 2020.05.18					NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 2EDGKR-5.0-XXP-1Y-00A(H) DRAWING NO.: 10001870			
ITEM NAME OF PART MATERIAL NOTES 1 Housing PA66 UL94V-0 2 Cover PA66 UL94V-0 3 Pin Copper Sn Plated 4 cage Copper alloy Ni Plated 5 Screws Steel M3/Zn Plated					ITEM NAME OF PART MATERIAL NOTES 1 Housing PA66 UL94V-0 2 Cover PA66 UL94V-0 3 Pin Copper Sn Plated 4 cage Copper alloy Ni Plated 5 Screws Steel M3/Zn Plated			

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:	B	C	D
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	320/20	/
额定冲击电压(kV)/Rate Impulse Voltage(kV)	/	4	/
额定扭矩/螺栓和螺母/Torque Tightening(N·m/Lbin)	M3, 0.8/7.02		
柔性范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	2.5/28~12		
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~22P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		