

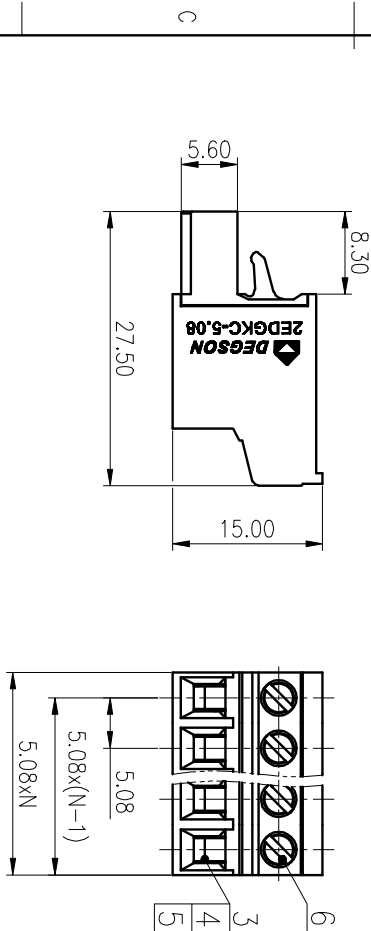


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	≤
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2

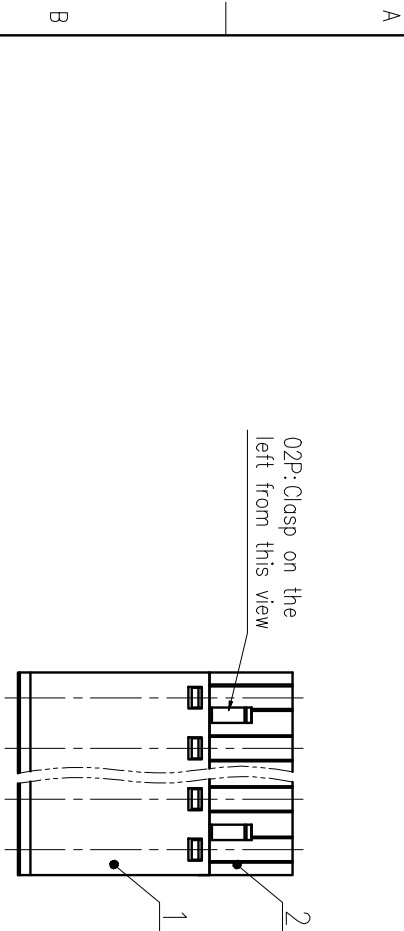

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw	Steel	M2.5/Zn Plated
5	Cage	Steel	M2.5/Zn Plated
4	Block	Steel	Zn Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/10	150/7.0	300/7.0
IEC 标准/IEC Standard:	过压类别/Overvoltage Category/污染等级/Pollution Degree		
额定电压/电压/Rated Voltage(V)/Current(A)	III/3	III/2	II/2
额定冲击电压/电压/Rated Impulse Voltage(KV)	/	320/20	/
额定扭矩/扭矩/Tightening(N·m/Lbin)	M2.5, 0.4/3.54	4	/
导线范围(导线规格)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/28~12	5.08/N=02~24P	/
间距/间距/Spacing length(mm)	9-10	-40~+105	/
工作温度范围/Operating temperature(°C)	-40~+105	Yes	/
符合RoHS要求/Conform to RoHS	SURFACE: /		

MATERIAL:	/
MAT NO.:	/
STATUS:	/
NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD: LonChH	2020.05.14
CHKD: GongYzh	2020.05.14
DFT: YindK	2019.08.02
DRAWING NO.:	2EDGKC-5.08-C01
TYPE:	CUSTOMER DRAWING
SCALE:	1.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

D C B A

1 2 3 4 5 6