


公差等级/General Tolerances(mm)	
0	>3
~	>6
3	>10
6	>18
10	>30
±0.12	>50
±0.18	>60
±0.22	>80
±0.26	>100
±0.31	>120
±0.37	>150
±0.43	>180
±0.50	>200
±0.57	>250
±0.63	>315
±0.70	>400
±0.78	>500
±0.85	>630
±0.93	>800
±1.05	>1000
±1.15	>1250
±1.20	>1600
±2.20	>2000
±2.50	>2500
±Z	0.1/1/10

PCB LAYOUT

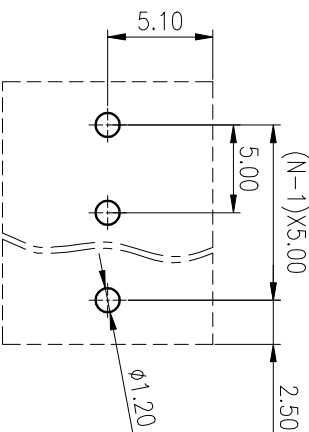

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PBT	UL94V-0
2	Cover	PBT	UL94V-0
3	Button	POM	UL94HB
4	Pin header	Copper alloy	Sn Plated
5	Clamp	Stainless steel	/

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DG390-5.0-XXP-1Y-00A(H)	
APPD:	LiGL 2020.05.27	DRAWING NO.: DG390-5.0-C04	
CHKD:	Mek 2020.05.27	TYPE: CUSTOMER DRAWING	
DRT:	MSh 2020.05.27	SCALE:	2.5:1 SHEET 1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级	/	III/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	250/13.5	/
工频耐压/Withstanding voltage(V/1Min)	/	AC2000	/
线径范围(裸线/带绝缘)/Wire Range(rigid and flexible)(mm ² /AWG)	/	1.0/22~18	/
间距/Pitch(mm)/线径范围/Strip length(mm)	/	5.0/N=02~24P	/
使用温度范围/Operating Temperature(°C)	/	-40~+105	/
符合RoHS要求/Conform to RoHS	/	Yes	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/