
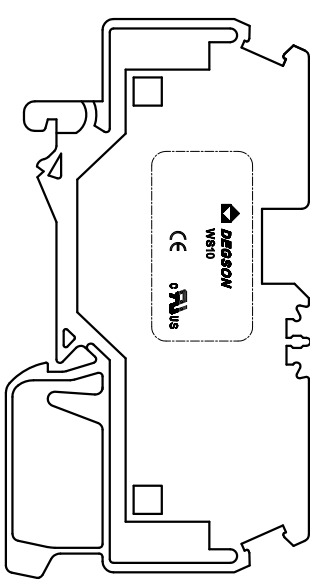



公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>10
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
±2	±2	±2	±2

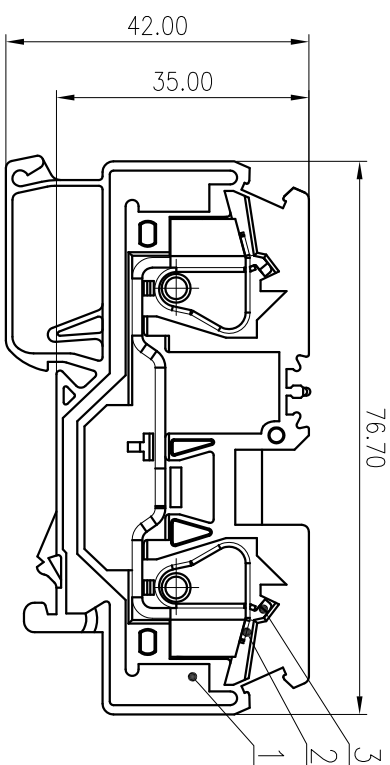

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	600/50	600/50	600/50
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/57	/	/
额定脉冲电压/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~10/24~8		
间距/Pitch(mm)	10.0		
剥线长度/Stripping length(mm)	13~14		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	PANTONE / RAL		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.05.29
 CHKD: Mao J 2020.05.29
 DRAFT: LIN 2006.10.19

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: WS10-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES	REV	ECN	DESCRIPTION	DRAFT	DATE
3	Current Carrier	Copper	Sn Plated					
2	Spring	Stainless Steel						
1	Housing	PA66	UL94V-0					