
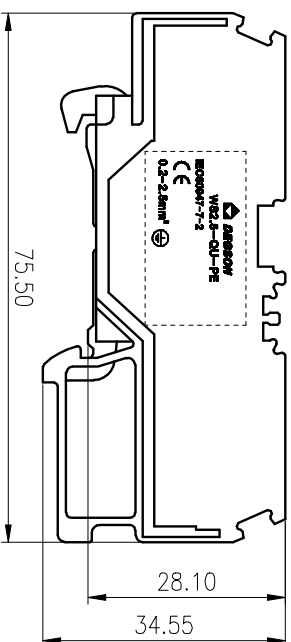
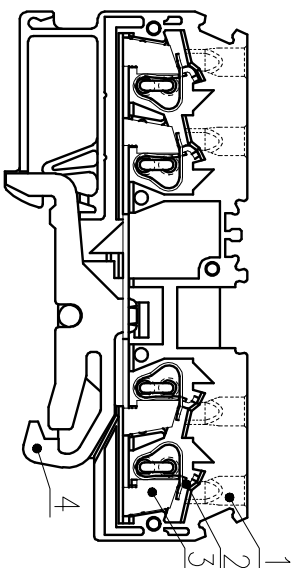


规格公差/General tolerances(mm)		尺寸/Dimension										比例/Scale	
0	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	±1/10
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													

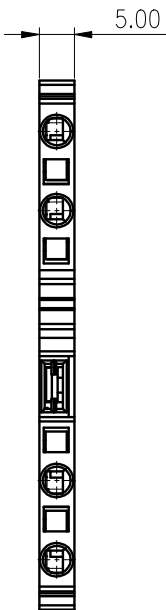

ITEM	NAME OF PART	MATERIAL	NOTES
4	Ground Pin	Copper alloy	Sn plated
3	Current carrier	Copper	Sn plated
2	Spring	Steel	
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/28~12		
间距/Pitch(mm)	5.00		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: LIGL 2020.05.28
 CHKD: Mool 2020.05.28
 DRT:ZhengQG 2020.05.28

NINGBO DEGSON ELECTRICAL CO., LTD
 WS2.5-QU-PE-01P-1C-00A(H)

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET
1								1/1

D

C

B

A

D

C

B

A