
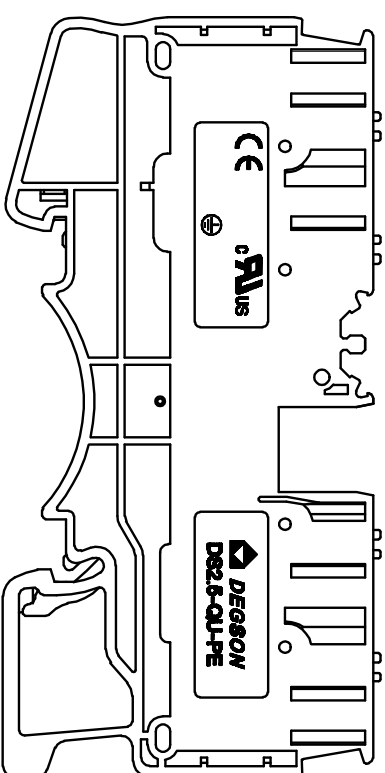


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		

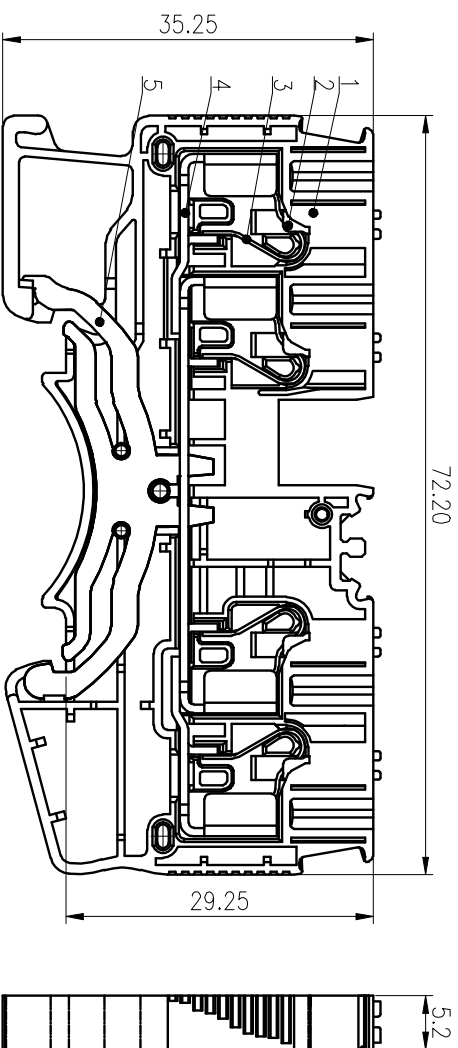

ITEM	NAME OF PART	MATERIAL	NOTES
5	Grounding	Copper alloy	Sn plated
4	Current carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL:	SURFACE:
MAT NO.:	/
STATUS:	/
APPD: Li GL 2020.03.27	NAME:
CHKD: Ma EK 2020.03.27	DS2.5-QU-PE-01P-1C-00A(H)
DRAFT: Huang Sh 2017.09.20	DRAWING NO.: DS2.5-QU-PE-C01
TYPE: CUSTOMER DRAWING	SCALE: 1.5:1 SHEET
SIZE: A4	REV
	DD-5
	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电源/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等	III/3	/	/
额定电压/电源/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(硬线/软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~2.5&4(SOL)/2.6~12	/	/
剥线长度/Stripping length(mm)	10~12	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/

**DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD