
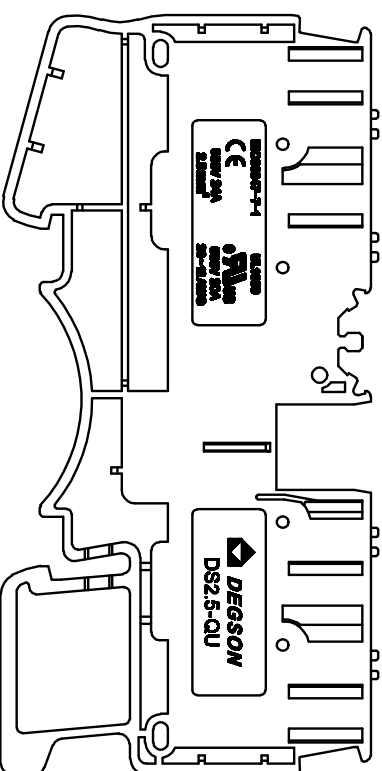
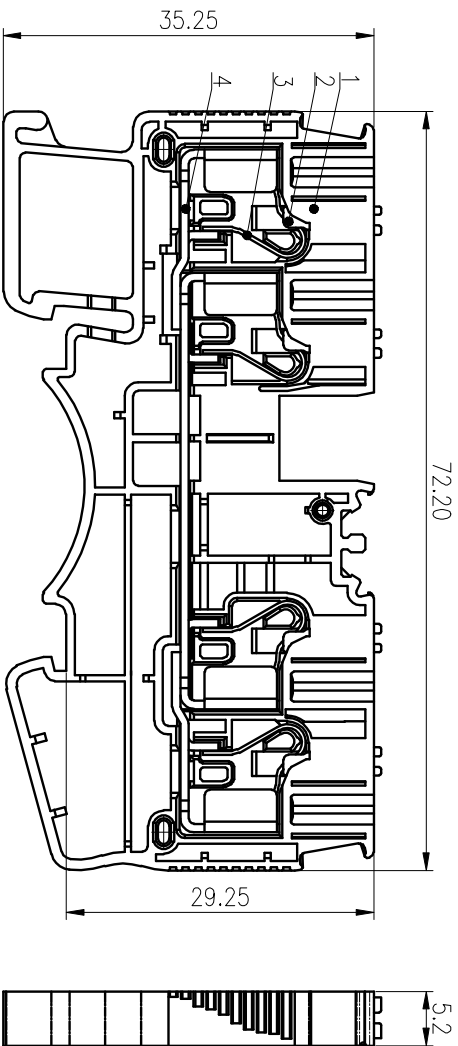


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			



UL 标准/UL Standard:	B	C	D
额定电压/电源/Rated Voltage(V)/Current(A)	600/20	600/20	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电源/Rated Voltage(V)/Current(A)	800/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(裸线/镀锡)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~2.5 & 4(SOL)/26~12		
引线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

D

ITEM	NAME OF PART	MATERIAL	NOTES
4	Current carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0

REV

EGN

DESCRIPTION

DRAFT

DATE

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 1.5:1 SHEET

REV

DD-5

1/1

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DSS2.5-QU-01P-1Y-00A(H)

DRAWING NO.: DSS2.5-QU-C01

APPD: Li GL 2020.03.27

CHKD: Ma EK 2020.03.27

DRAFT: Huang Sh 2017.09.20

C

B

A

1

2

3

4

5

6