
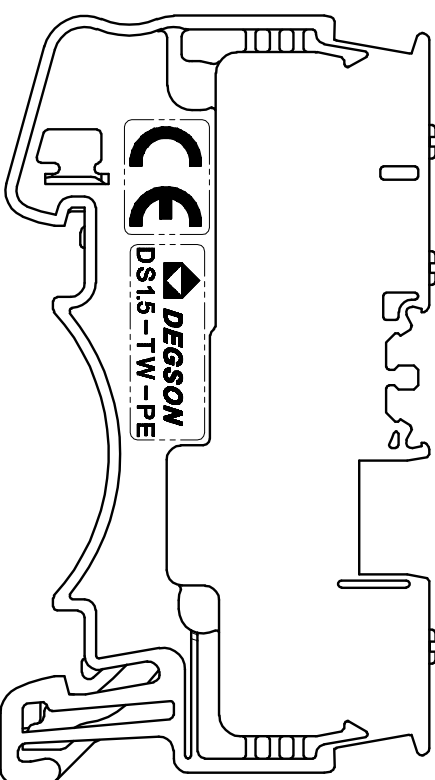
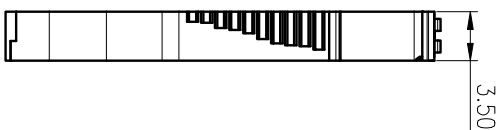


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±Z		~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±Z		±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

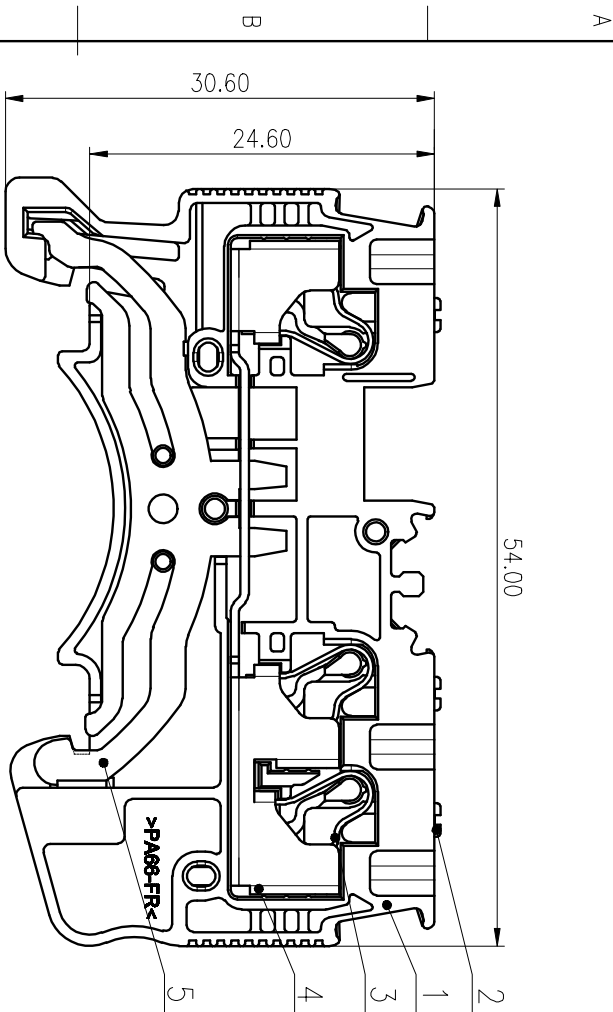

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6	/	/
线径范围(硬线/软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.14~1.5/ 26~16&14(SOL)	/	/
间距/Pitch(mm)	3.5	/	/
剥线长度/Stripping length(mm)	8-10	/	/
使用温度范围/Operating Temperature(°C)	-40~+105	/	/
符合RoHS标准/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/

MATERIAL: /

MAT NO.: /

STATUS: /

Appd: Li QL 2020.04.03

CHKD: /

DRT: MoEK 2018.10.25

**DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DS1.5-TW-PE-01P-1C-00A(H)

DRAWING NO.: DS1.5-TW-PE-C01

TYPE: CUSTOMER DRAWING

5	Grounding	Copper alloy	Sn Plated
4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
1			

REV	ECN	DESCRIPTION	DRT	DATE
1				

MATERIAL: /	SURFACE: /
SIZE: A4	SCALE: 2:1
TYPE: CUSTOMER DRAWING	SCALE: 2:1
REV	REV
1/1	1/1