
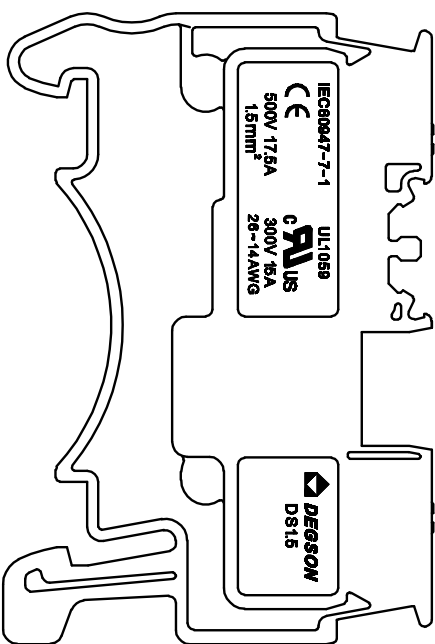
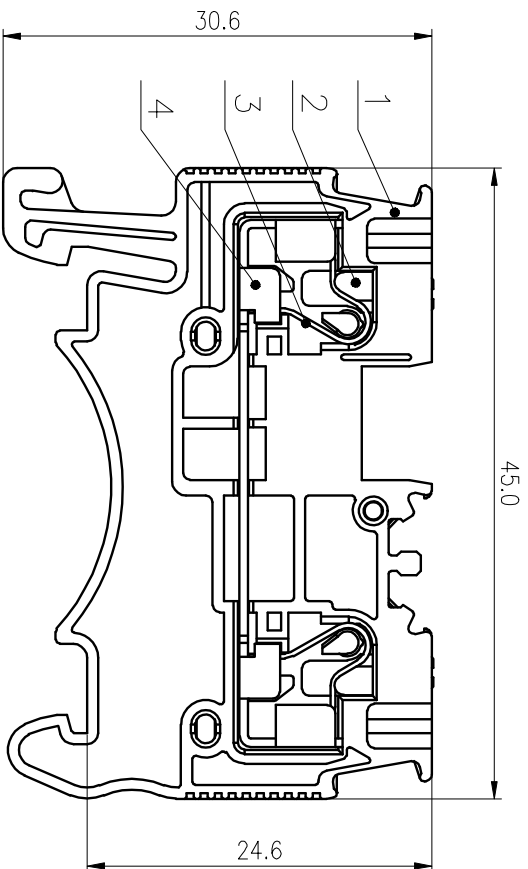


公差/General Tolerances(mm)		公差/General Tolerances(mm)										公差/General Tolerances(mm)	
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~
F0.12	F0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±Z

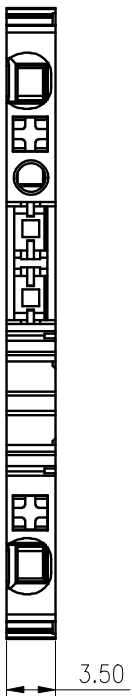

ITEM	NAME OF PART	MATERIAL	NOTES
4	Current carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DS1.5-01P-1Y-00A(H)	
APPD:	Li GL 2020.03.27	DRAWING NO.: DS1.5-C01	
CHKD:	Moo J 2020.03.27	TYPE: CUSTOMER DRAWING	
DRAFT:	Liuzh 2019.03.18	SCALE:	2:1
		REV	T0
		SHEET	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	300/15	300/10
IEC 标准/IEC Standard:			
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	500/17.5	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.14~1.5/26~14		
间距/Pitch(mm)	3.5		
剥线长度/Stripping length(mm)	8~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		