

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE




SP-M12X-XXP-FF-SH800X-00A(H)

Coding: A,B,D

Pin number: 03,04,05,
06,08,10,12


Thread specification:
001: PG9
002: M16*1.5

10pin A Coding	12pin A Coding	5pin B Coding	4pin D Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View

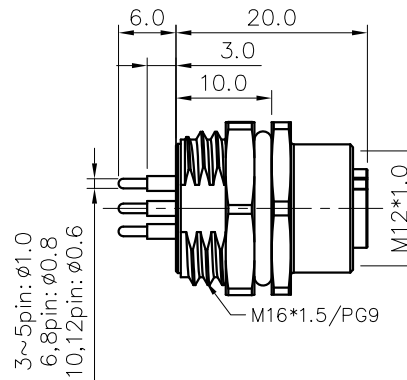

10- $\phi 0.80$	12- $\phi 0.80$		
PCB Layout	PCB Layout	PCB Layout	PCB Layout

Thread specification:
PG9




Panel Mounted

NOTES:

- Rated voltage/current : 3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
6pin A: 30V / 2A
8pin A: 30V / 2A
10pin A: 30V / 1.5A
12pin A: 30V / 1.5A
5pin B: 60V / 4A
4pin D: 250V / 4A

3pin A Coding	4pin A Coding	5pin A Coding	6pin A Coding	8pin A Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View

Thread specification:
M16*1.5



Panel Mounted

- Withstanding voltage : 3,4pin A: AC1500V/1Min
5pin A,10,12pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min
- Levels of protection: IP68
- Wire connection mode: soldering(PCB)
- Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- For Panel Thickness Max: 4.5mm
- RoHS Compliance
- Tolerance : $\pm 0.5\text{mm}$

PCB Layout	PCB Layout	PCB Layout	PCB Layout	PCB Layout

DETACHED LISTS	PART NO.: SPM12XXXPFSSH800X00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SP-M12X-XXP-FF-SH800X-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV: D0-1	SHEET: 1/1	
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SCALE: 1:1	
		DO NOT SCALE DRAWING		