

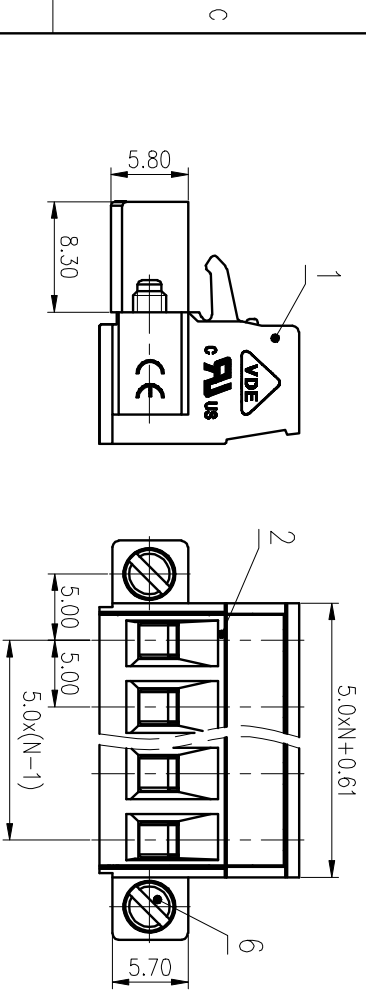


公差等级/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	0.1/10
±0.12/±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2

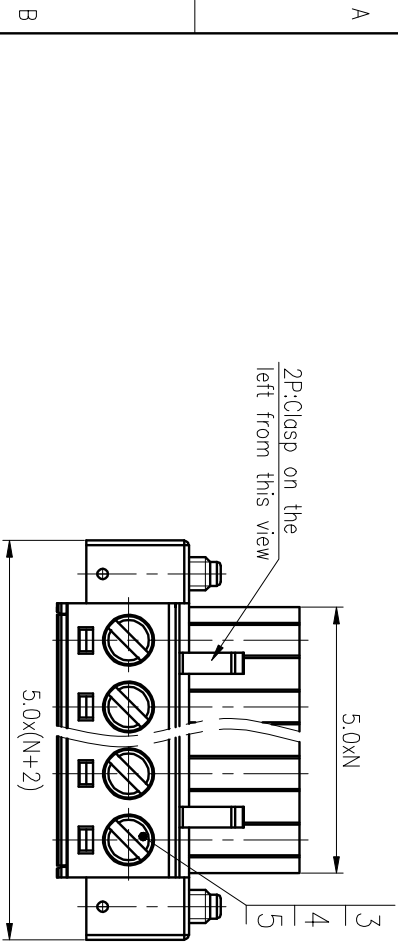

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw2	Steel	M2.5/7m Plated
5	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	Ni Plated
3	Screw1	Steel	M3/7m Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Retard Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:	300/10		
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3		
额定电压/电压/Retard Voltage(V)/Current(A)	/	/	320/20
额定冲击电压(KV)/Rote Impulse Voltage(KV)	/	/	4
额定扭矩/Torque Tightening(N·m)	M3: 0.58		
线径范围(硬导线/软线)/Wire Range(rigid and flexible)(mm²/AWG)	1.0~2.5/28~12		
间距/Pitch(mm)/导线范围/Poles	5.0/N=02~22P		
引线长度/Stripping length(mm)	7-8		
操作温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

**DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: ZEDGKM-5.0-XXP-1Y-1000A(H)

APPD: LonCHH 2020.005.26  
CHKD: GongYZh 2020.05.26

DRAFT: FRZ 2015.11.16

DRAWING NO.: ZEDGKM-5.0-C09

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 2:1	SHEET
1/1							T1