


公差等级 (General Tolerances)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630	>800	>1000
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.45	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±3.15	±4.00	±5.00	±6.30

ITEM	NAME OF PART	MATERIAL	NOTES
1	End housing	PA66	UL94V-0
2	Center housing	PA66	UL94V-0
3	Cover	PA66	UL94V-0
4	Pin header	Copper	/
5	Spring	Stainless steel	/

UL 标准 /UL Standard:	B	C	D
额定电压/额定 Voltage(V)/Current(A)	300/40	/	300/10
IEC 标准/IEC Standard:	/		
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2
额定电流/额定 Current(A)	630/41	1000/41	1000/41
额定电压/额定 Voltage(V)/Rated Voltage(V)/Rated Impulse Voltage(KV)	6	6	6
额定冲击电压(KV)/Rote Impulse Voltage(KV)	6	6	6
额定电压(硬路和软路)/Wire Romnge(rigid and flexible)(mm ² /AWG)	0.2-6/24~8		
间距/Pitch(mm)/线径/Wire diameter	7.5/N=01~16P		
剥线长度/Stripping length(mm)	14-15		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

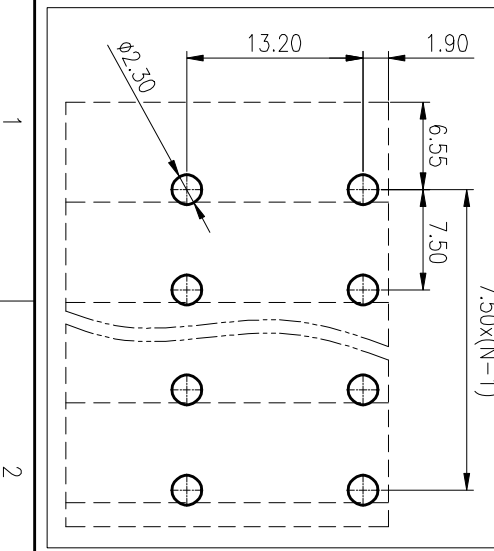

MATERIAL: /		SURFACE: /	
MAT NO.: /		NAME: DEGSON[®] NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /		DRAWING NO.: DG271R-7.5-005	
APPD: Li GL 2020.05.15		REV: T1	
CHKD: MoEK 2020.05.15		SCALE: 2:1	
DRT: BYH 2018.10.08		TYPE: CUSTOMER DRAWING	
REV		SHEET	
ECN		1/1	
DESCRIPTION		DATE	
DRAFT		DATE	
REV		DATE	