
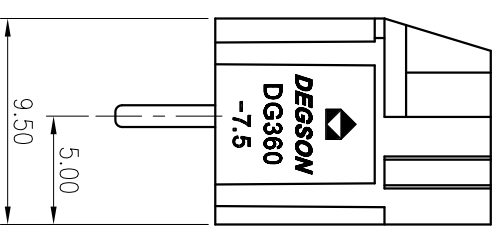
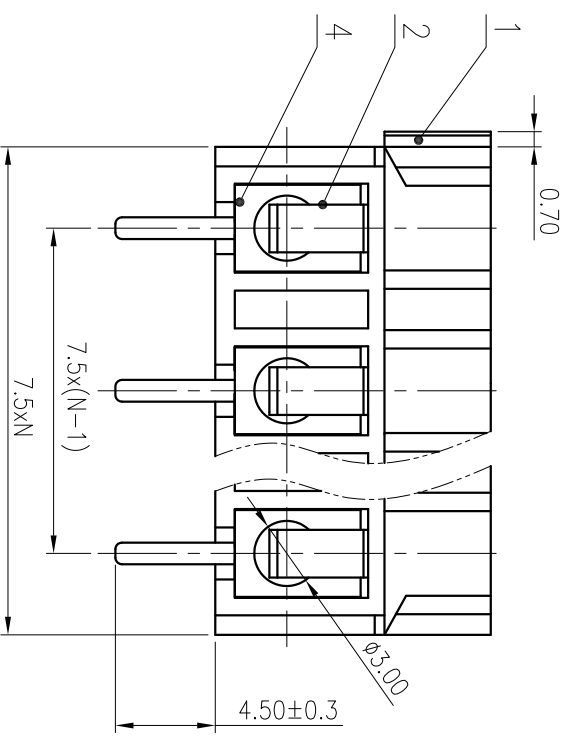
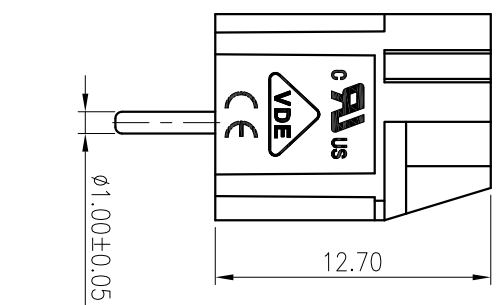
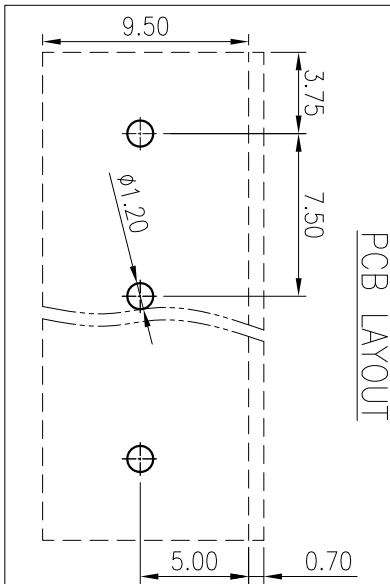


公差表/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.19	±1.60	±2.20	±2.50	±2.50	±2.50	±Z

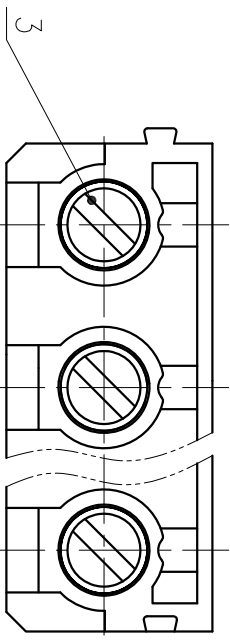

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper alloy	M3/Sn plated
3	Screw	Steel	M3/Zn plated
2	Spring	Stainless steel	/
1	Housing	PBT	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
EC 标准/EC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	450/24		
工频耐压/Withstanding voltage(V/Min)	AC2500		
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M3, 0.5/4.43		
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	1.0~2.5/22~14		
间距/Pitch(mm)/线数范围/Poles	7.5/N=02~24P		
剥线长度/Stripping length(mm)	6~8		
使用温度范围/Operating temperature(°C)	-30~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE:

MATERIAL:

MAT NO.: /  
 STATUS: /  
 APPD: Lan CHH 2020.05.15  
 CHKD: Yu JZh 2020.05.15  
 DRAFT: Wu LF 2020.05.15

DEGSON® 宁波高松电子有限公司  
 NINGBO DEGSON ELECTRICAL CO., LTD  
 NAME: DG360-7.5-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 3:1	REV	T0
1					mm inch			1/1	