


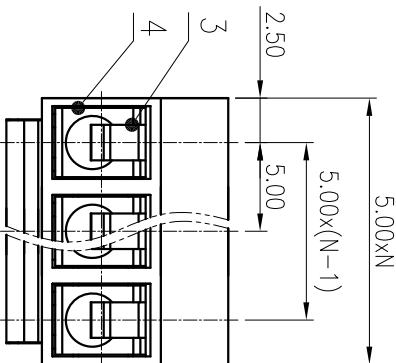



公差表/General tolerances(mm)		公差表/General tolerances(mm)	
0	>3	>10	>180
3	~6	~18	~250
6	10	30	400
~	18	50	500
±0.12	±0.18	±0.22	±0.31
±0.26	±0.31	±0.37	±0.57
±0.80	±0.93	±1.05	±1.15
±2.20	±2.20	±2.20	±2.50
±2	±2	±2	±2



ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Screw	Steel	M3/Zn plated
3	Clamp	Copper alloy	Sn plated
4	Cage	Copper alloy	M3/Ni plated

UL 标准/UL Standard:		B	C	D
额定电压/Rated Voltage(V)	Current(A)	300/10	/	/
EC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	250/12	/
工频耐压/Withstanding voltage(V/Min)		AC2000		
螺丝扭矩/Torque Tightening(N·m/Lb·in)		M3, 0.5/4.3		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		2.5/28~14		
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~20P		
剥线长度/Stripping length(mm)		5-6		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS				

MATERIAL:

SURFACE:

MAT NO.: /
STATUS: /

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

APPD:lan CHH 2020.05.20
CHKD:Yu JZh 2020.05.20

NAME: DG331-5.0-XXP-1Y-00A(H)

DRT: ZQ 2012.12.27

DRAWING NO.: DG331-5.0-C01

REV ECN DESCRIPTION

DRT DATE

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 2.5:1 SHEET 1/1