
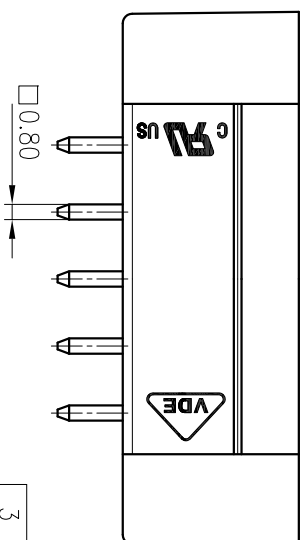
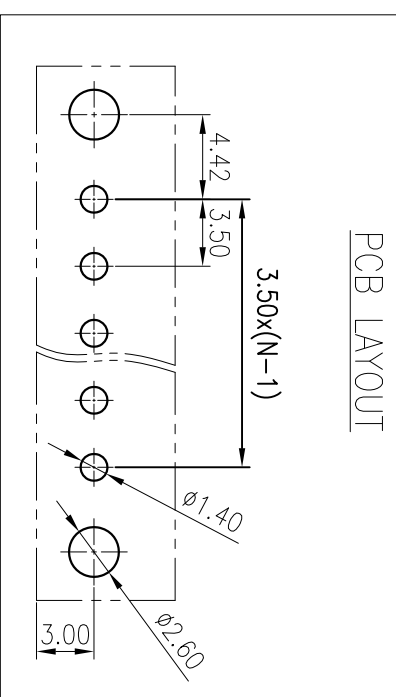
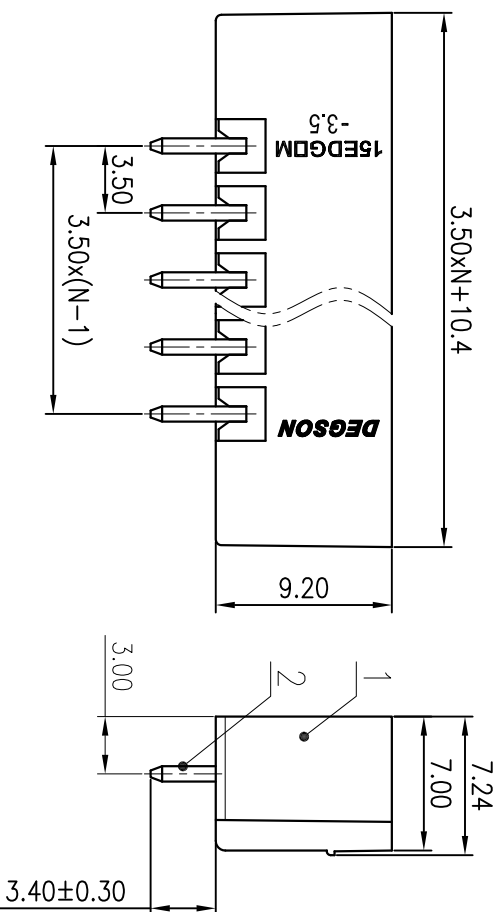


公差/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/0
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			±2

管 中 心 用  
研 发 专 用  
2020.06.02  
(仅限内部使用, 对外无效)

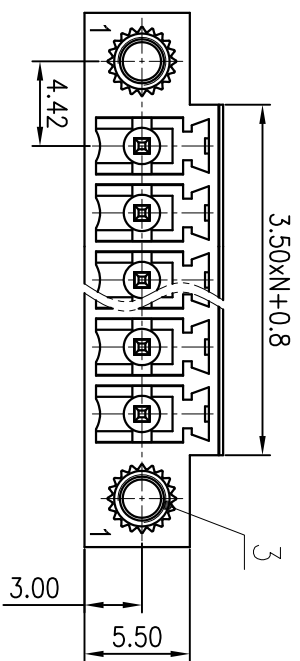

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw cap	Copper alloy	M2.5
2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B
额定电压/电流 /Rated Voltage(V)/Current(A)		300/8
IEC 标准/IEC Standard:		
过压类别/Overvoltage Category/污染等级/Pollution Degree		II/2
额定电压/电流 /Rated Voltage(V)/Current(A)		250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5
间距/Pitch(mm)/线数范围/Poles		3.50/N=02~22P
使用温度范围/Operating Temperature(C)		-40~+105
符合RoHS环保要求/Conform to RoHS		Yes

MATERIAL:

SURFACE:

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGVM-3.5-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE	TYPE	SCALE	SHEET
(12)		Change the drawing and tolerance table	Yu JZn	2020.06.02	A4	CUSTOMER DRAWING	2.5:1	1/1