
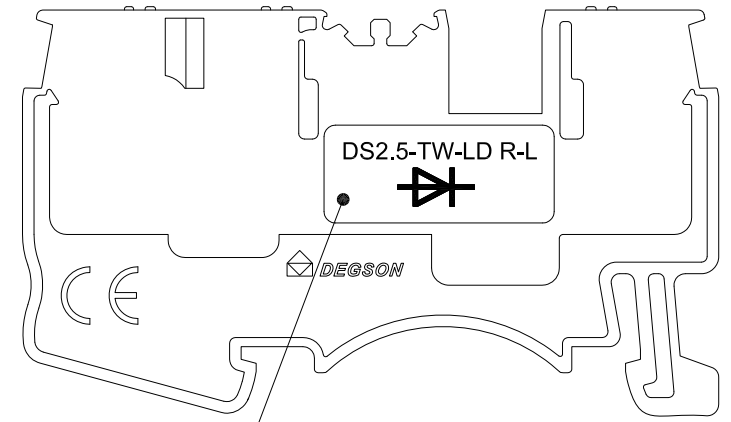
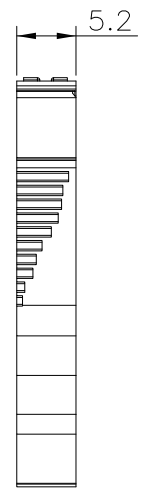
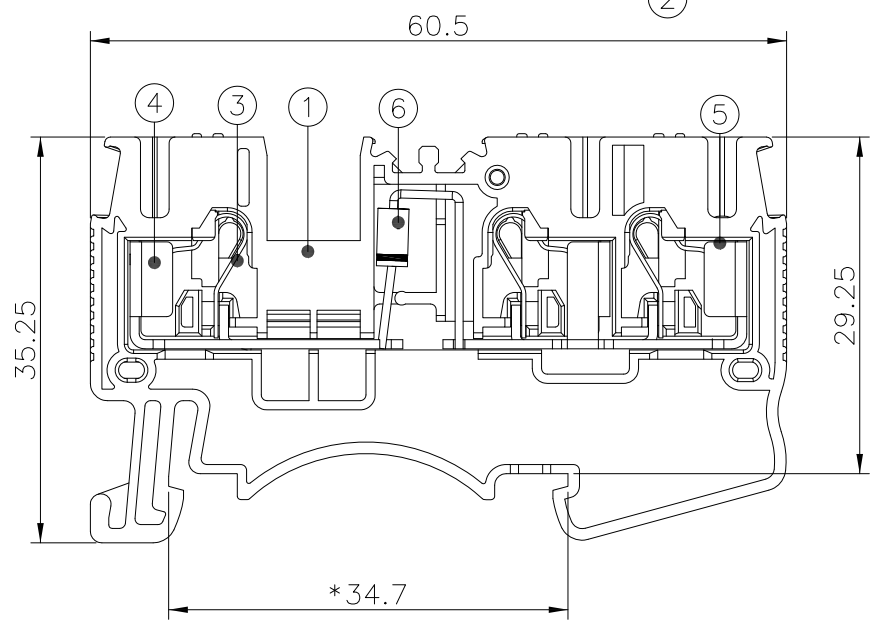
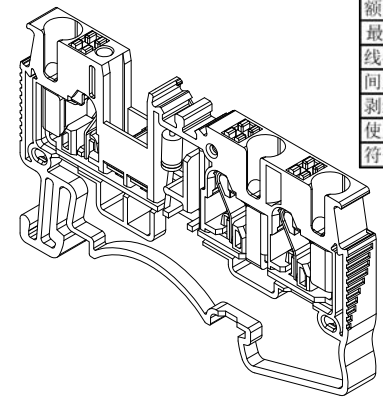


未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	0.1/10 ±2'		
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~500			
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

额定电压/电流/Rated Voltage(V)/Current(A)	300/1A
最大逆向电压/Rverse Valtage(KV)	1.3
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm <sup>2</sup> )	26-12/0.2-2.5&4(sol)
间距/Pitch(mm)	5.2
剥线长度/Stripping length(mm)	10-12
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

1.Font:Arial  
2.Color:Black



1.Font:Arial  
2.Color:Black

6	Diode	/	/
5	Current_carrier 2	Copper	Sn Plated
4	Current_carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL: /	SURFACE: /		
		MAT. NO./REV: /	MAT. STATUS: /		
APPD: LiGL	2021.08.16	NAME			
CHKD: MoEK	2021.08.12	DS2.5-TW-LD R-L-OIP-IY-00A(H)			
DRFT: MIS	2021.08.12	DRAWING NO. /	TYPE CUSTOMER DRAWING	DRAWING STATUS /	SCALE 2:1
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET 1/1

00	/	/	MIS	2021.08.12	DRFT: MIS	2021.08.12	DRAWING NO. /	TYPE CUSTOMER DRAWING	DRAWING STATUS /	SCALE 2:1	SHEET 1/1
REV	ECN	DESCRIPTION	DRFT	DATE	DRFT	DATE	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET

Transfer or Distribution of this document is well as the utilization or reproduction of its contents are prohibited unless authorized in writing. All rights reserved for patent, trademark or design registrations. 未经授权，不得复制或传播本文件内容。保留所有权利。