
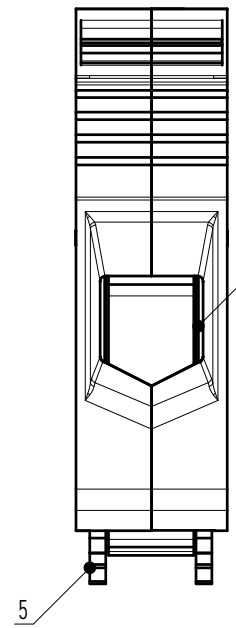
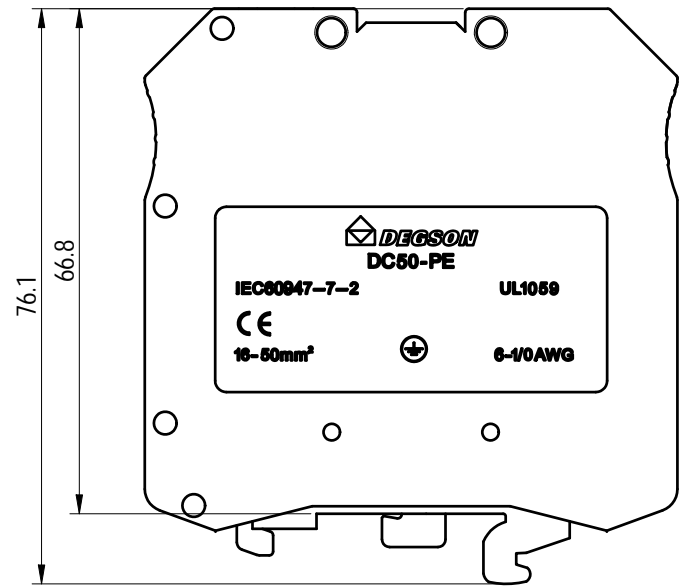
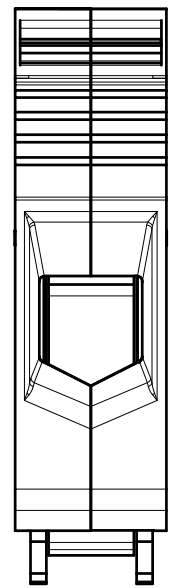
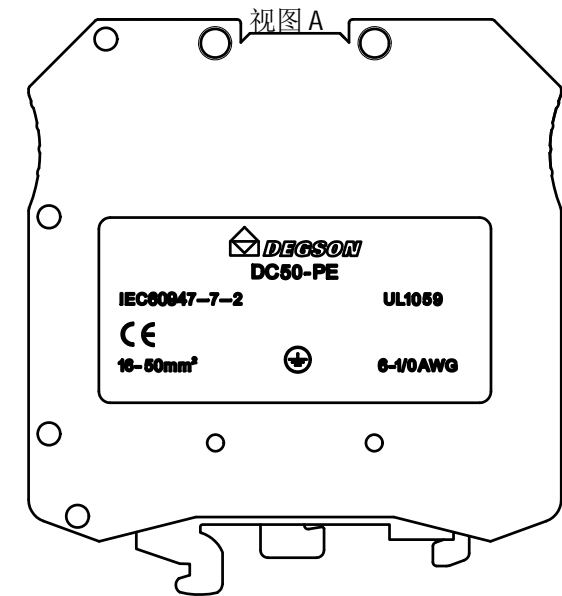


Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent. 除专利等明确标注外，其他内容均受法律保护。未经许可，不得复制或传播。 0.1/10

FOR-1755 Rev. 1.7

5	Ground contact	/	/
4	Cage	Steel	Zn Plated
3	Screw	Copper Alloy	Zn Plated
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

公差/General tolerances (mm)													0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

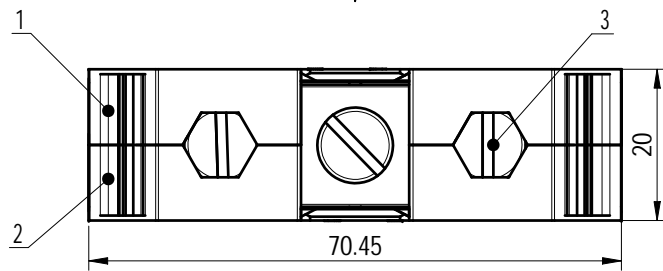

5	Ground contact	/	/
4	Cage	Steel	Zn Plated
3	Screw	Copper Alloy	Zn Plated
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M6, 6.0/52.17		
线径范围(硬线和软线)/Wire Range (rigid and flexible)(AWG/mm²)		6-1/0 / 16-50		
间距/Pitch(mm)/线数范围/Poles		20/N=01P		
剥线长度/Stripping length(mm)		22~23		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		

<b>DEGSON</b>		MATERIAL: /	SURFACE/COLOR: /	
APPD: Peng M 2022.08.21		MAT NO./REV: / / /		
CHKD: Gao WG 2022.08.21		MAT STATUS: /		
DRFT: Huang RJ 2022.08.21		NAME		
DRAWING NO. /		DC50-PE-01P-1Y-00A (H)		
TYPE		DRAWING STATUS		
CUSTOMER DRAWING		SCALE		
/		1:1		
A4		SHEET		
(inch)		1/1		

00	/	/	Huang RJ	2022.08.21
REV	ECN	DESCRIPTION	DRFT	DATE