

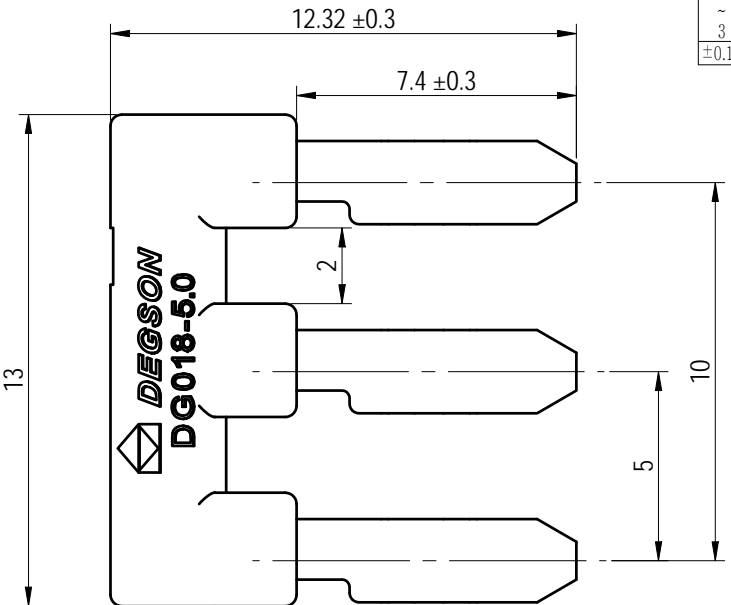
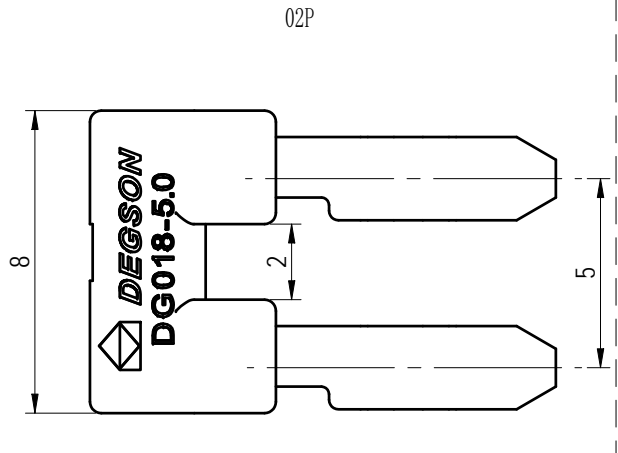
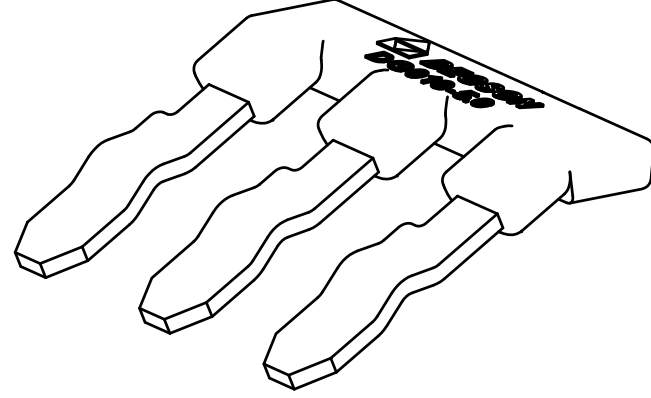


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 任何未经许可的复制或传播，以及未经授权的使用、复制或传播，均属于侵权行为。DEGSON 保留所有权利。

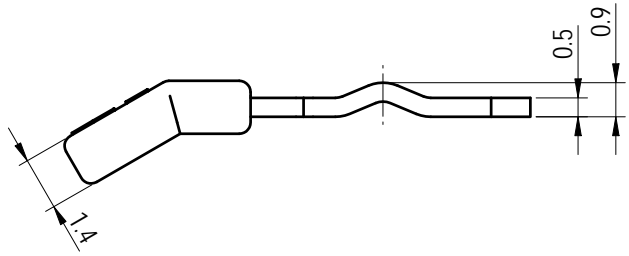

未注公差/General tolerances (mm)												0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

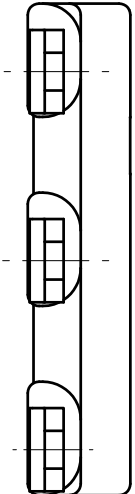

IEC额定电流/Current(A)	12A
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~03P
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

DEGSON		MATERIAL: PA66	SURFACE/COLOR:	
APPD: 兰春华 2022.07.19		MAT NO./REV: / 00	MAT STATUS: 批量	
CHKD: 龚耀志 2022.07.19		NAME		
DRFT: 方哲盛 2022.07.18		DG018-5.0-XXP-1Y-00Z(H)		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200074942	CUSTOMER DRAWING	已发布	5:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			方哲盛	2022.07.18