



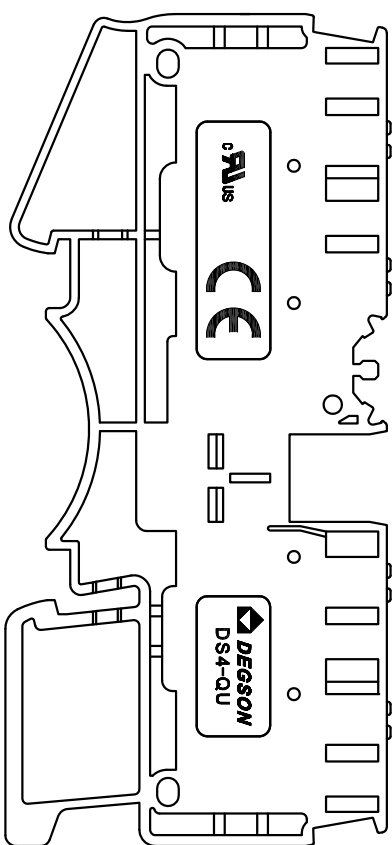

公差范围 (General Tolerances)(mm)		公差范围 (General Tolerances)(mm)		公差范围 (General Tolerances)(mm)		公差范围 (General Tolerances)(mm)		公差范围 (General Tolerances)(mm)		公差范围 (General Tolerances)(mm)			
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~	3	~	6	~	10	~	18	~	30	~	50	~	80
~	6	~	10	~	18	~	30	~	50	~	80	~	120
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
±2°													

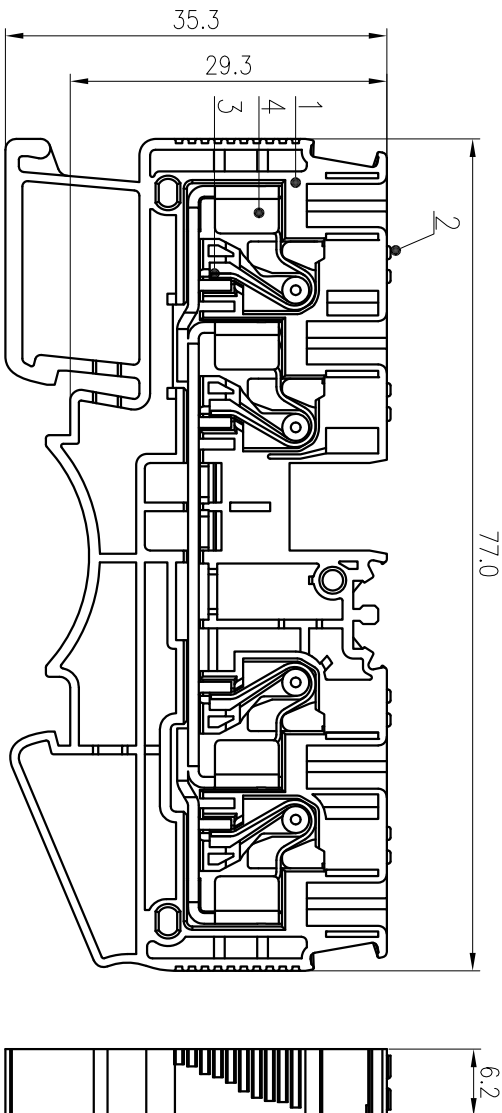

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/30	600/30	600/5
FC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/32	/	/
额定脉冲电压/电流(Rate Impulse Voltage(KV))	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4.6(S0L)/24~10		
间距/Pitch(mm)	6.2		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.04.20
 CHKD: Mao J 2020.04.20
 DRAFT: Liu ZhH 2017.11.17

DEGSON® 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DS4-QU-01P-1Y-00A(H)
 TYPE: CUSTOMER DRAWING
 SCALE: 1.5:1 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES	REV	EON	DESCRIPTION	DRAFT	DATE
4	Current Carrier	Copper	Sn plated					
3	Spring	Stainless steel						
2	Button	PA66-GF	UL94 V-0					
1	Housing	PA66	UL94 V-0					